


Minimum Clearances

Fig# 3

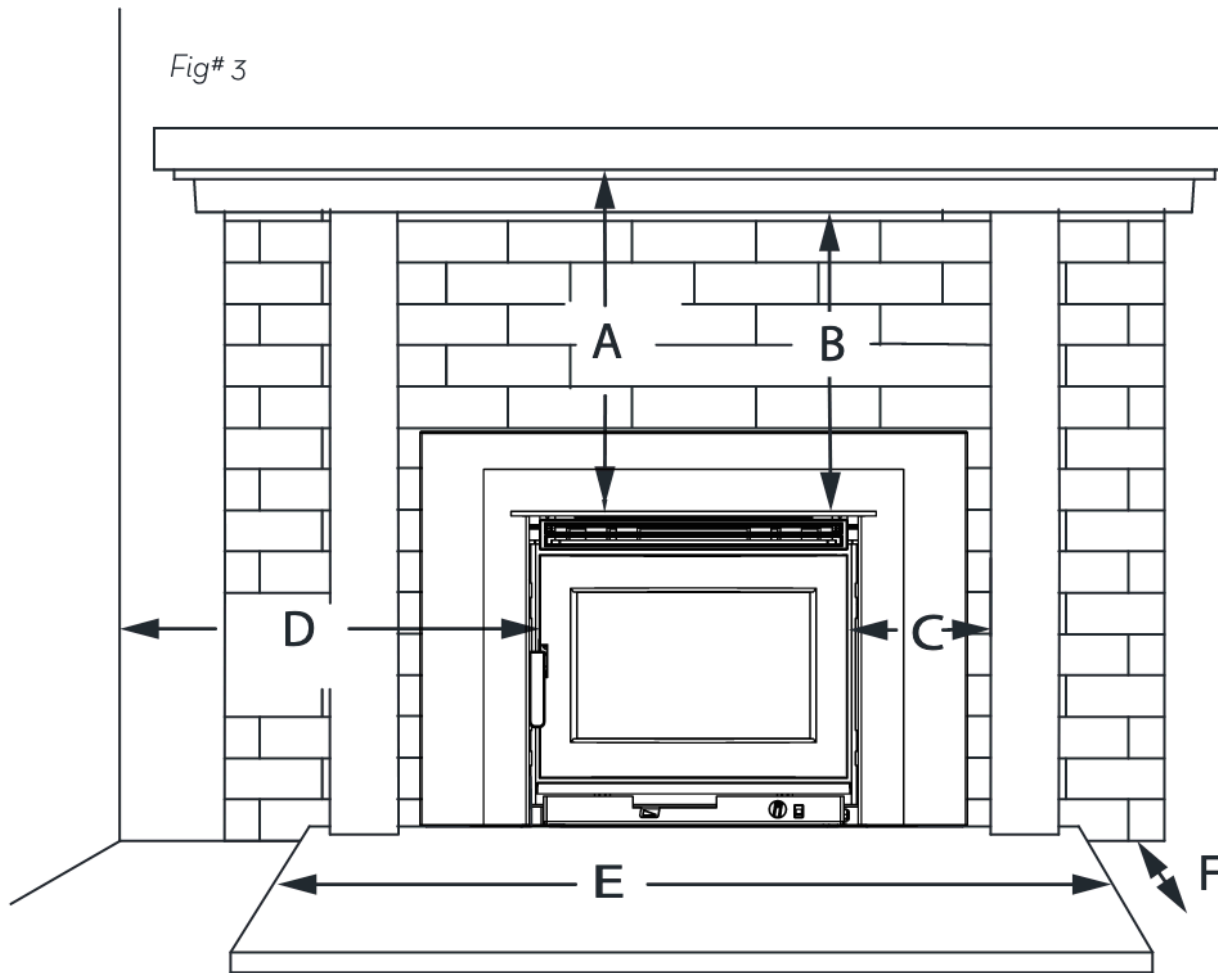

Minimum Clearances to Combustibles

(Measured From Top of Brow)

- A: Mantel405mm
- B: Mantel Key390mm

(Measured from Side of Door)

- C: Mantel Upright.....250mm
- D: Adjacent Sidewall.....380mm

- E: Hearth Width.....872mm

(Measured from Front of Appliance Base)

- F: Hearth Depth.....500mm

ZERO CLEARANCE Ember protection:

Combustible floor beneath and in front of the fireplace insert must be protected from hot embers by non-combustible material (18mm thick Cement Fibre Board or similar) extending 500mm from the Front Base of the unit. The floor protector must be a minimum of 872mm Wide x 1075mm Deep x 18 mm Thick with a thermal resistance of 0.19m²kW