


# Minimum Clearances

Fig# 3

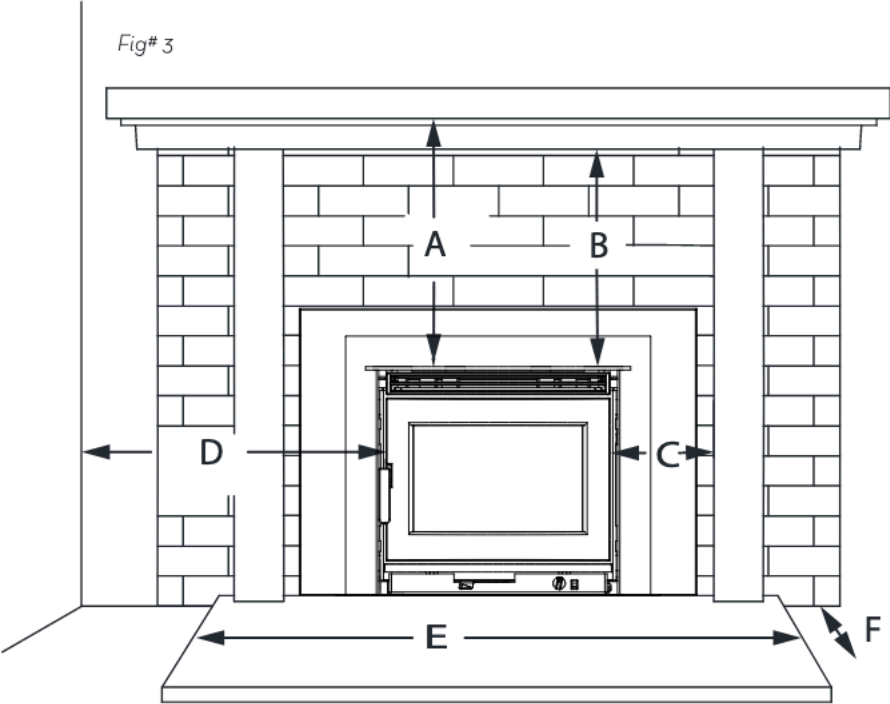

## Minimum Clearances to Combustibles

**(Measured From Top of Brow)**

- A: Mantel .....405mm
- B: Mantel Key .....390mm

**(Measured from Side of Door)**

- C: Mantel Upright .....150mm
- D: Adjacent Sidewall .....380mm

- E: Hearth Width .....872mm

**(Measured from Front of Appliance Base)**

- F: Hearth Depth .....500mm

**ZERO CLEARANCE Ember protection:**

Combustible floor beneath and in front of the fireplace insert must be protected from hot embers by non-combustible material (18mm thick Cement Fibre Board or similar) extending 500mm from the Front Base of the unit. The floor protector must be a minimum of 872mm Wide x 1075mm Deep x 18 mm Thick with a thermal resistance of 0.19m<sup>2</sup>kW